



Ref. ADO1000

ADO 1000 is the high security certified version (PAS68:2013 English Certification concerning a Crash test done with a 7500 kg truck at 80 km/h), typically used for the anti-terrorism protection at the highest levels. The 1000 series requires the installation of a basement compartment of about 400 mm; it rises from the ground 1000 mm and the lengths available are: 2m, 3m, 4m, 5m and 6m (greater lengths available on request).




MEASURES:

Total width: 2090 mm.

Open height: 1000 mm.

Total height: 1292 mm.

Total length: 3400 mm.

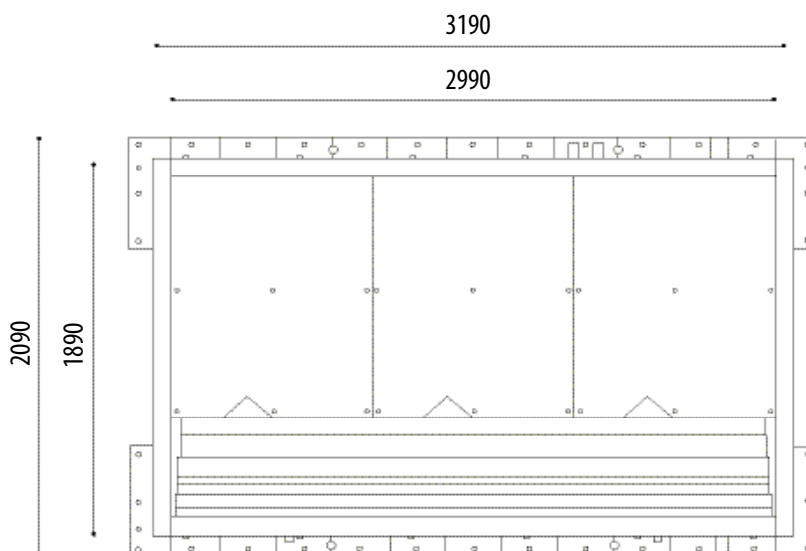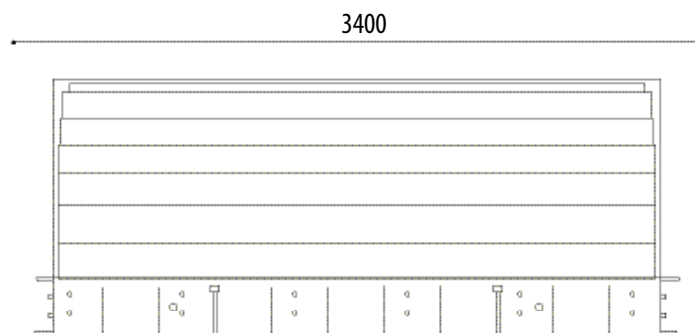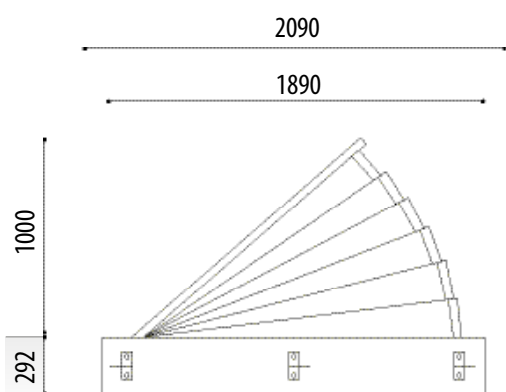

CHARACTERISTICS	VALUES
Platform height	1.000 mm.
Standard platform length	2 a 6 meters.
Platform depth	300 mm.
Movement	Hydraulic.
Upload speed	8 seconds.
Download speed	5 seconds.
Manual emergency lowering	Yes.
Platform finish	Non-slip aluminum plate. Stainless steel (optional).
Load class	UNI D400.
Voltage for control unit	230 vac 50 / 60 Hz.
Hydraulic pump	Built into the control unit.
Protection degree	IP67.
Reflective adhesive strips	Yes. Height 55 mm.
Impact resistance	2.000.000 J.
Nominal operating temperature	-40° C + 70° C (for temperatures below -10° C, use the heating element).
Connection line for control unit	Standard 10 m. (maximum length 30 m.).
Type of use	Intensive.

