

ADO 500 road blocker is the basic version, not certified, typically used for perimeter protection of companies, hotels, convention centers and similar.

The 500 series requires the installation of a basement compartment of about 300mm. It rises from the ground 500mm and the lengths available are : 2m, 3m, 4m, 5m and 6m (greater lengths are available on request).


MEASURES:

Total width: 1390 mm.

Open height: 500 mm.

Total height: 792 mm.

Total length: 3400 mm.

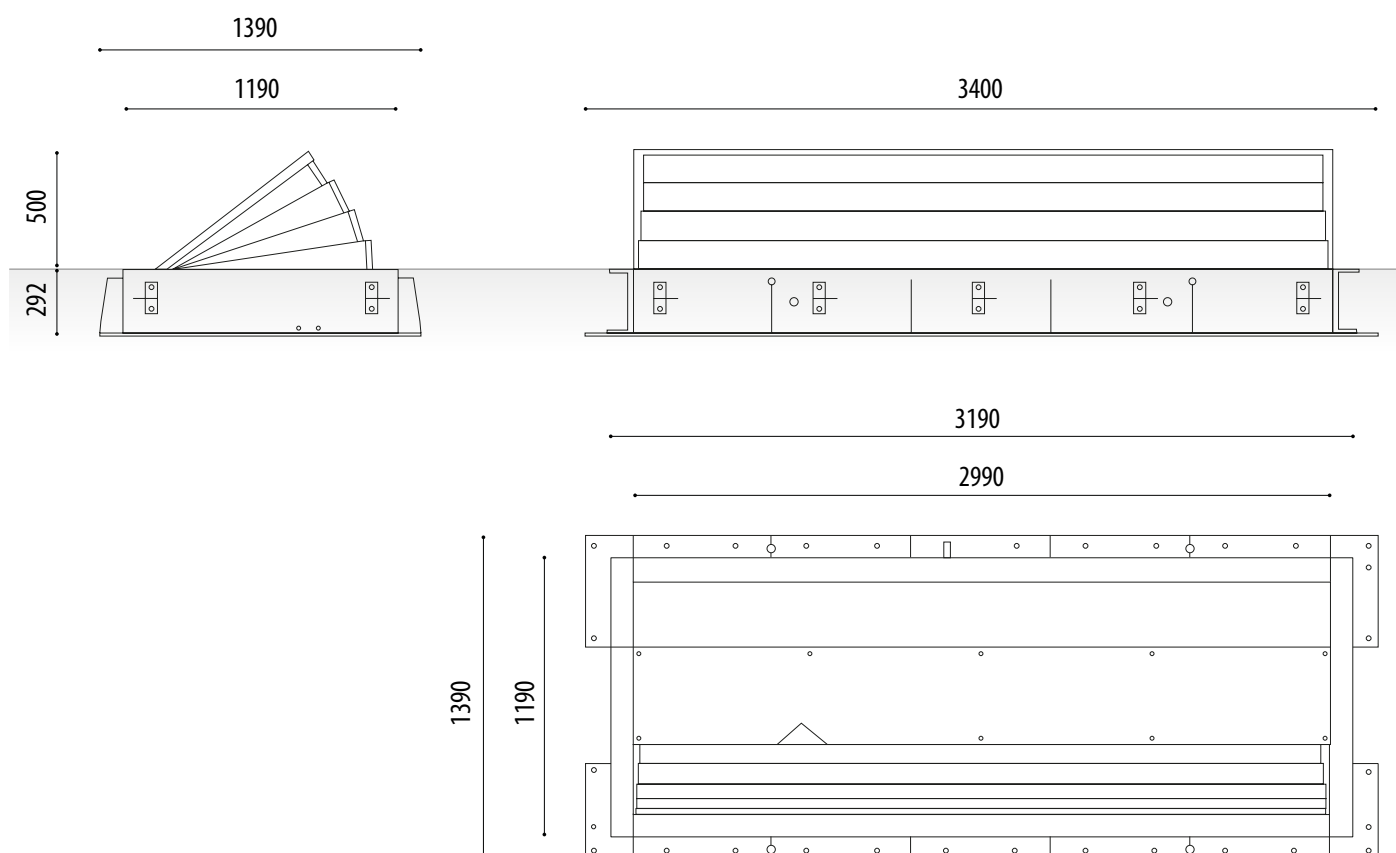

FEATURES	VALUES
Platform height	500 mm
Standard platform length	2 to 6 meters
Platform height below the ground	300 mm
Movement	Hydraulic
Ascent speed	5 seconds
Descent speed	3 seconds
Emergency manual descent	Yes
Platform finish	Anti-slippery aluminium plate. Stainless steel (optional)
Load class	UNI D400
Voltage for control panel	230/400 vac 50/60 Hz
Hydraulic pump	Integrated into the control panel
Degree of protection	IP67
Reflective tapes	Yes Height: 55 mm
Breakage resistance	750,000 J.
Rated operating temperature	-40° C +70° C
Connection line for control unit	Standard 10 m (maximum length 30 m).
Type of use	Intensive

