


### MEASURES:

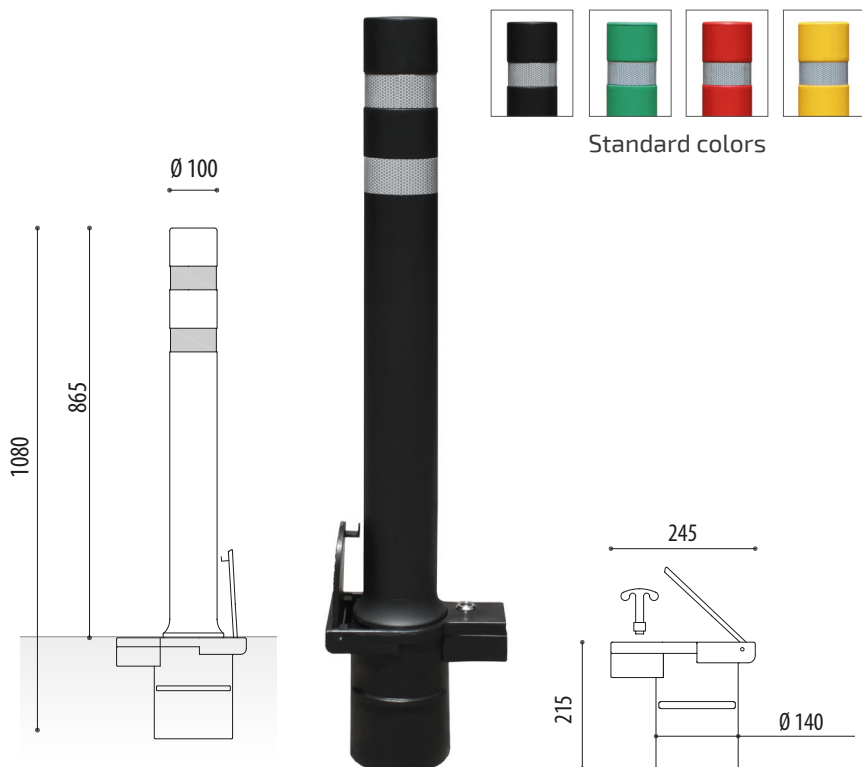

Flexible polyurethane bollard / bollard A-Flex DT (double reflective strip) with removable black plastic base or removable galvanized iron base. Base specially designed for our flexible bollard A-Flex DT with hinged top cover. By simply inserting a flexible bollard into the base, the bollard can be locked using a standard triangular key located on the side of the base to lock the lid once closed or to lock the bollard once inserted into the hole.

### A-FLEX DT MODELS:

- Black.....Ref. PFLEXDTHN
- Green .....Ref. PFLEXDTHV
- Red .....Ref. PFLEXDTHR
- Yellow.....Ref. PFLEXDTHA



### REMOVABLE BASE:

- Plastic.....BEXTRAP01
- Iron ..... BEXTRAH01




BEXTRAP01







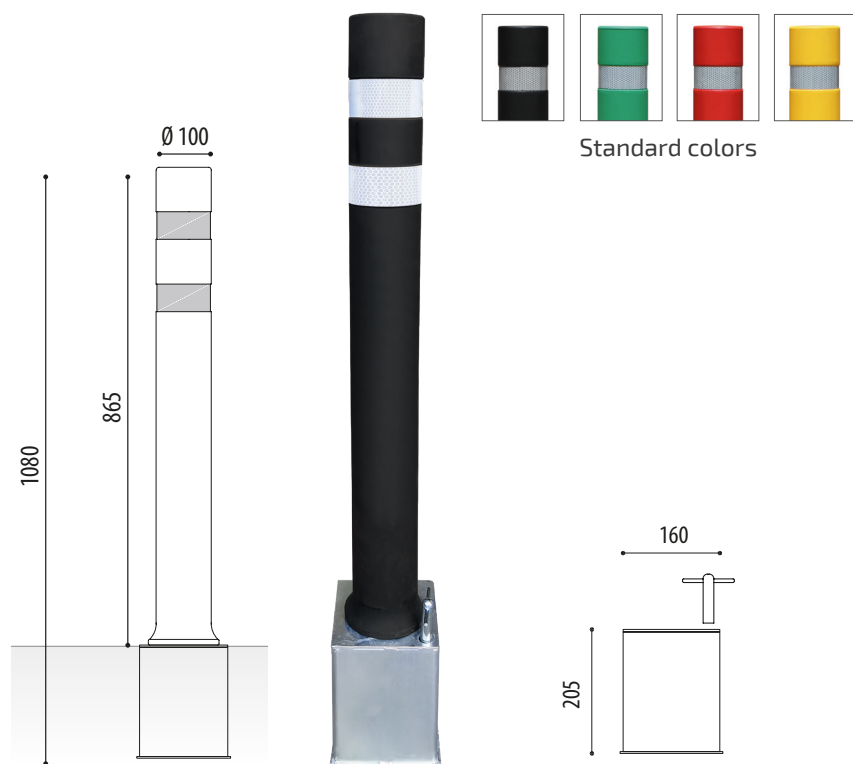




BEXTRAH01

### MEASURES:





### A-FLEX BOLLARDS ADVANTAGES:

-  Virtually unbreakable.
-  100 % recyclable.
-  Not painted. No rust. Maintenance-free.
-  Memory bollard; in case of impact, it returns to its original shape and position.
-  High resistance to many solvents, oils and greases.
-  Excellent impact resistance and flexibility on a wide range of temperatures.
-  High resistance to abrasion.
-  Pleasant to touch.
-  Aesthetically identical to metal bollards.



*The properties of this material allow that in case of impact, the bollard comes back to its original shape and position. They don't break, they don't get dented and they don't oxidize.*

### ADVANTAGES COMPARING TO OTHER BOLLARDS

#### Vs bollards made of metal:

- Not rust.
- Less weight.
- Less rumors generated.
- Resistance to corrosion.
- Zero maintenance.

#### Vs bollards made of plastic:

- Zero fragility.
- Elastometric memory (compression set resistance).
- Resistance to abrasions.

#### Vs bollards made of rubber:

- Resistance to abrasions.
- Resistance to cut and injuries.
- Resistance to push and dynamic loads.
- Resistance to the ozone.

#### Vs bollards of casting polyurethane:

- Working at high temperatures.
- No crystallizing (final break of the bollard).
- High resistance to wet environments (even hydrolysis).
- Numerous chemical agents.




### ● A-FLEX BOLLARDS CERTIFICATES:

1. Certificate Applus IDIADA impact-proof bollard A-Flex head (HIC).

Obtained result in test are less than <650.

A-Flex is less than 216 (slight rating).

Applus<sup>+</sup>  
IDIADA

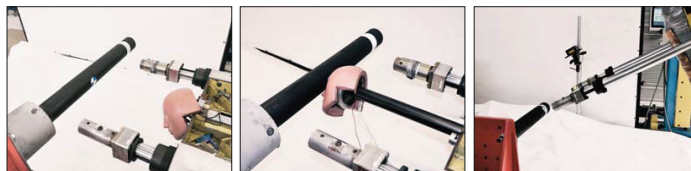

2. Certificate Applus IDIADA impact-proof bollard A-Flex body (AIS).

Obtained results show a level of acceleration of the body which relates with a possibility of suffering from a damage is AIS3 of <10%.

Applus<sup>+</sup>  
IDIADA



3. Certificate of overcoming a deflection of 2000 cycles at 90°.

They were realized more than 2.000 cycles of flexion without appearing any line in the surface of the bollard and coming back to its original position after suffering a strength which had flexed in to the 90°.

Applus<sup>+</sup>  
IDIADA



4. Certificate impact-proof from a vehicle at more than 80 km/h.

Impact from a vehicle at more than 80 km/h against the A-Flex bollard without being damaged.



5. Certificate of Resistance to fire Clase E.

This classification was realized according to what explained in the Norm UNE-EN 13501-1:2007+A1:2010: "Classification of the behaviour facing fire for the products to be built of the elements for edification".



6. Certificate of compliance Reach.

A-Flex bollards manufactured with materials according to the strict normative REACH (U.E.) at european nivel, they are free from heavy, polluting materials and damaging substances.



7. Certificate CE.

A-Flex bollards meet the general Directive of products in the European Community according to the norm 2001/95/CE, R.D. 1803/2003.

