



**Circular iron anti-moon security bollard built with two bodies**, one outside of anti-moon iron and the other inside, a reinforced iron core. Possibility of filling its interior with concrete, sand or gravel to reinforce it even more.

Ideal for commercial premises at street level, thus avoiding the landing of vehicles on them.

**MODELS:**

- Iron ø 120..... **Ref. PSEGR120G**
- Iron ø 152..... **Ref. PSEGR150G**
- Iron ø 220..... **Ref. PSEGR220G**

**OPTIONAL:**

- Personalization with logo engraving.
- Screws: **Ref. THEMBRA12**  
+ **T7380IM12X70**




**ACCESSORIES:**

- 1 ring for bollard. **Ref. S1AP**
- 2 rings for bollard. **Ref. S2AP**
- Galvanized chain ø 7,5 mm.  
**Ref. CD08012260**

**MEASURES:**

- Diameter: ø 120 / 152 / 220mm.
- Core diameter: ø 108 / 140 / 200 mm.
- Visible height: 750 mm.
- Overall height: 1013mm.
- Bollard thickness: 2 / 3 / 3 mm.
- Core thickness: 6 mm.

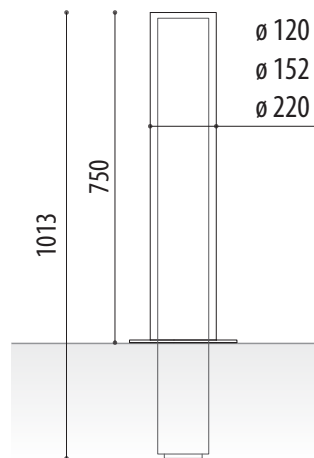

*Concrete interior option.*

