




### MEASURES:

Diameter:  $\varnothing$  90 / 104 / 204 mm.

Height: 800 mm.

Thickness: 2 mm.

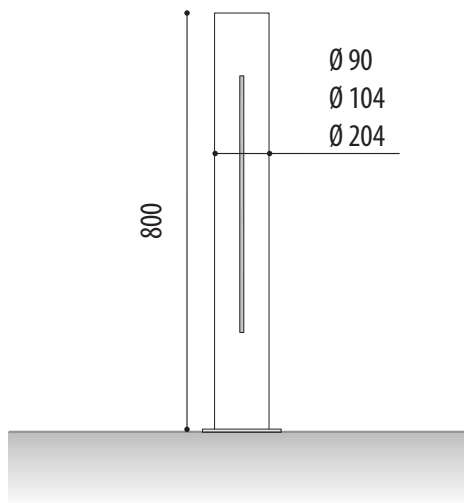

**Inox model luminous bollard with low consumption LEDs.** Built with 2 mm AISI 304 stainless steel tube. of thickness.

50mm led strip. high, located vertically in the body of the bollard. Possibility of up to 4 strips.

### STANDARD FINISHES:

#### White led:

Glossy finish  $\varnothing$  90. . . . . **Ref. PINOX90BLVB**

Matt finish  $\varnothing$  90. . . . . **Ref. PINOX90MLVB**

Glossy finish  $\varnothing$  104. . . . . **Ref. PINOX104BLVB**

Matt finish  $\varnothing$  104. . . . . **Ref. PINOX104MLVB**

Glossy finish  $\varnothing$  204. . . . . **Ref. PINOX204BLVB**

Matt finish  $\varnothing$  204. . . . . **Ref. PINOX204MLVB**

#### Red led:

Glossy finish  $\varnothing$  90. . . . . **Ref. PINOX90BLVB**

Matt finish  $\varnothing$  90. . . . . **Ref. PINOX90MLVR**

Glossy finish  $\varnothing$  104. . . . . **Ref. PINOX104BLVB**

Matt finish  $\varnothing$  104. . . . . **Ref. PINOX104MLVR**

Glossy finish  $\varnothing$  204. . . . . **Ref. PINOX204BLVB**

Matt finish  $\varnothing$  204. . . . . **Ref. PINOX204MLVR**

### OPTIONAL:

- AISI 316 stainless steel.
- Personalization with logo engraving.
- Other colors of leds to consult.
- Other colors and finishes on request.
- Other measures and diameters to consult.
- Possibility of choosing different colors of LEDs, patterns and operating sequences.

### RECOMMENDED SCREWS:

- For concrete:

$\varnothing$  11. - **Ref. T11L**



- For asphalt / panot:

$\varnothing$  10. - **Ref. T10X135**

