




Ref. PTAPNLVB



Ref. PTAPNLVR

MEASURES:

Diameter: $\varnothing 95$ mm.
Total height: 800 mm.
Thickness: 2.5 mm.

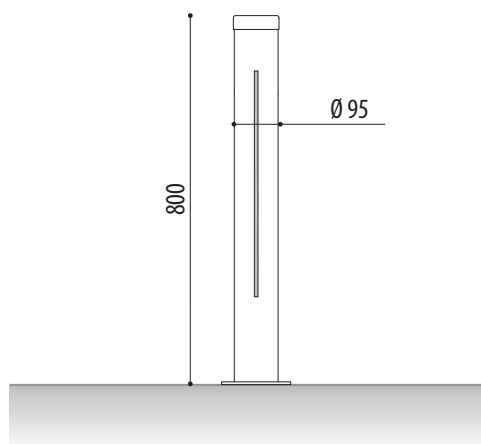

Tap model luminous bollard with low consumption LEDs. Constructed of oxiron color sendzimir galvanized steel tube, with a stainless steel top.

500mm led strip. high located vertically in the body of the bollard. Possibility of up to 4 strips of leds. Ideal for lighting paths, pedestrian areas, gardens, parks, ...

MODELS:

White led:

Gray oxiron (1 strip) Ref. PTAPNLVB

Gray oxiron (2 strips) Ref. PTAPNLVB2

Red led:

Gray oxiron (1 strip) Ref. PTAPNLVR

Gray oxiron (2 strips) Ref. TAPNLVR2

OPTIONAL:

- Personalization with logo engraving.
- Other colors of Leds to consult.
- Other colors and finishes on request.
- Possibility of choosing different colors of LEDs, patterns and operating sequences.

RECOMMENDED SCREWS:

- For concrete:

$\varnothing 11$. - Ref. T11L



- For asphalt / panot:

$\varnothing 10$. - Ref. T10X135



ACCESSORIES:

- 1 ring for bollard. Ref. S1AP
- 2 rings for bollard. Ref. S2AP
- Galvanized chain of $\varnothing 6$ mm. Ref. CG6100
- 40 mm brass padlock. steel bow. Ref. CNMCAD40